
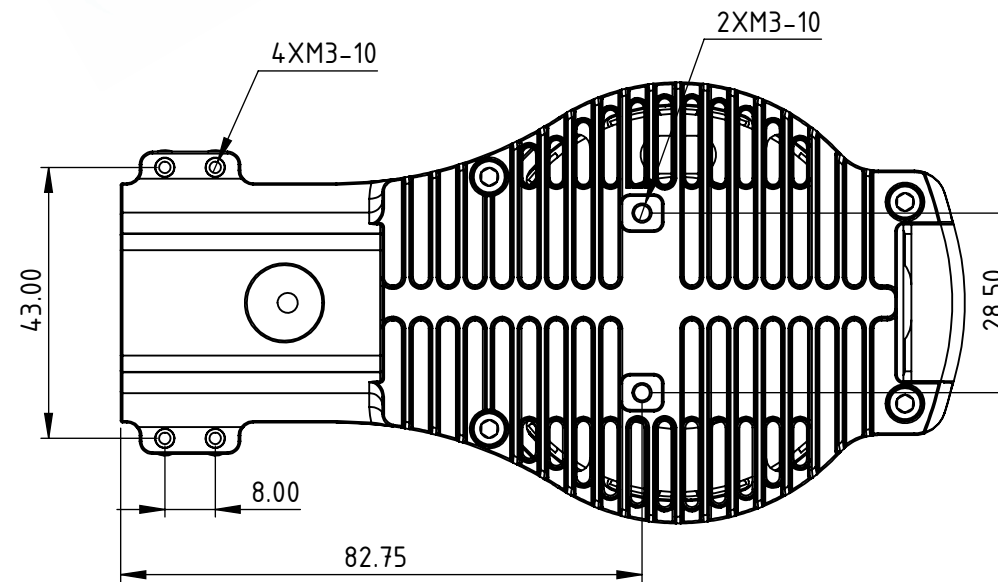
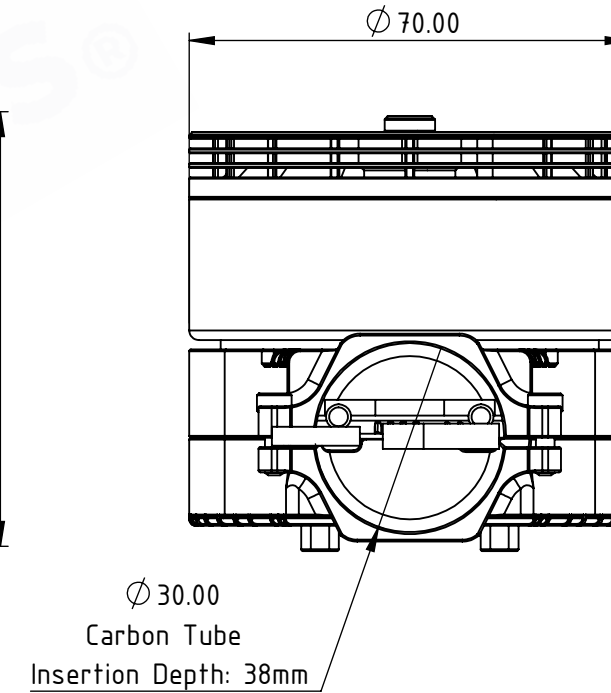
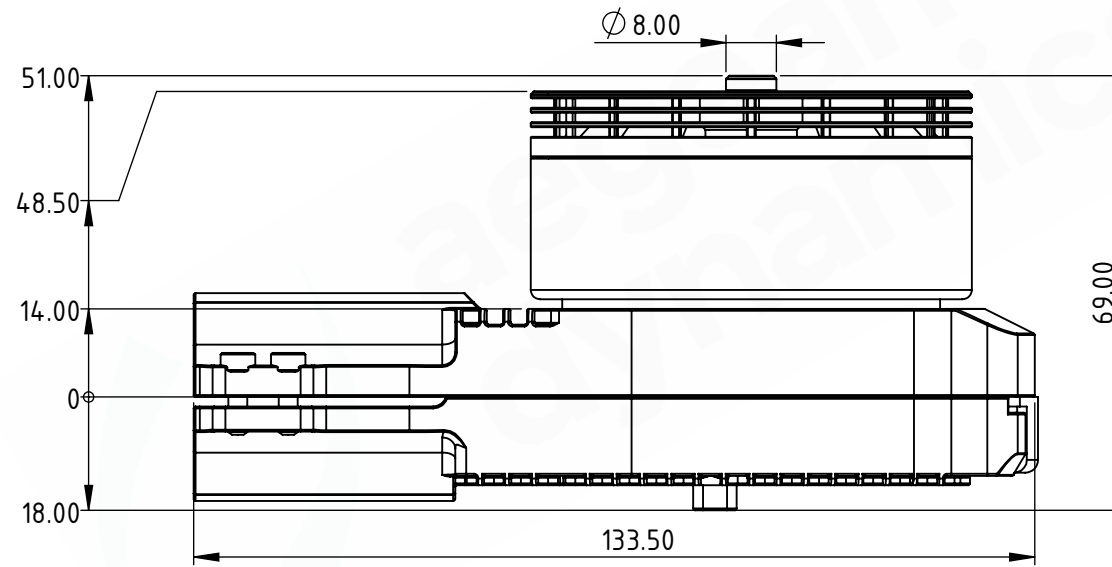


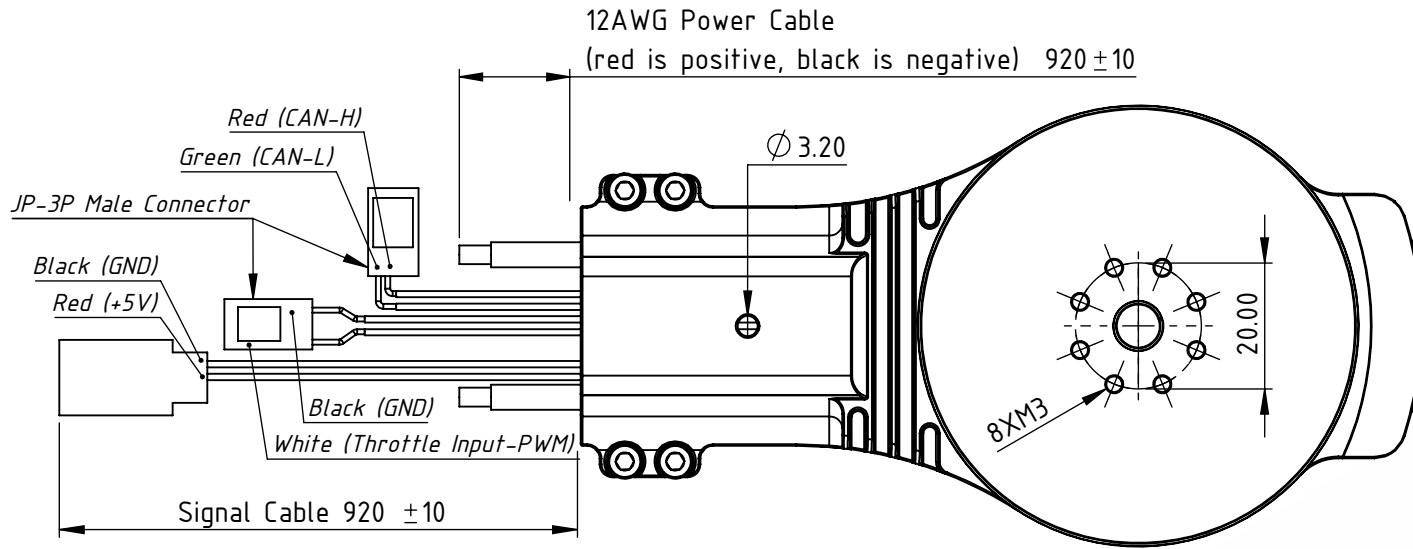

Temel Motor Parametreleri Basic Motor Parameters	
Giriş Gerilimi (V) Input Voltage	46
DC Giriş Akımı (A) Input DC Current	51
Anma Gücü (W) Rated Power	800
Mak. Güç (W) Max. Power	2500
Anma Hızı (rpm) Rated Speed	5400
Yüksüz Hız (rpm) No-Load Speed	6900
Anma Momenti (Nm) Rated Torque	3.87
Motorun Dönüş Yönü Direction Of Rotation	CW or CCW
Maksimum Motor Ağırlığı (~kg) Max. Motor Weight	0.760
Çalışma Sıcaklığı Aralığı Operation Temperature Range	-20 / +65
KV Rating (rpm/V) KV Rating	150
Mak. Verimlilik (%) Max. Efficiency	92
ESC Mak. İzin Verilen Gerilim (V) ESC Max. Allowable Voltage	64
ESC Sürekli Akım (A) Continuous Current	80
ESC Uyumlu Sinyal Frekansı (Hz) Compatible Signal Frequency:	50-500
ESC Akım Limiti (A) Current Limiting	84
ESC Gaz Kolu Darbe Genişliği (µs) ESC Throttle Pulse Width	1050-1950
Önerilen Batarya ESC Recommended Battery	12-14S LiPo
Güç Kablosu Uzunluğu (mm) ESC Powertrain Cable Length	920
Sinyal Kablosu Uzunluğu (mm) ESC Signal Cable Length	920

REVİZYONLAR / REVISIONS		
REV.	AÇIKLAMALAR / DESCRIPTIONS	TARİH / DATE
PROJECT TITLE		
DM-S70		
PRINCIPAL		
Aegean Dynamics Corp.		
29 Ekim, 10019. Sk. No:4 Menemen/izmir		
www.aegeandynamics.com		
aegean dynamics®		
PAGE		REVISION NO
1/1		R00
SHEET		SCALE
A3		1:2
DRAWN IS CHECKED		
APPROVED		GENERAL TOLERANCE
14/8/25 12:04		STANDARD ISO 1302
All rights of this picture belong to Aegean Dynamics Corp. belongs. It cannot be used or reproduced without written permission.		